

# Post Screen Series

Create a more Valuable Urban Advertising Media




Let shop window brighter and more clear, Let customers experience the scenery outside window, and make each store capture every selling point.



## Key Features


### Standardization

Standard display, fixed size and display size.




### Simple

Simple control, plug and play, simple and deft style, fulfill high effective work.

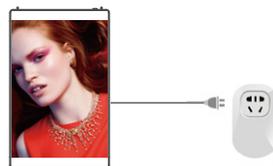

### Freestyle

Randomly applied to each indoor scene, flexible and varied, a trully moving advertising medium.

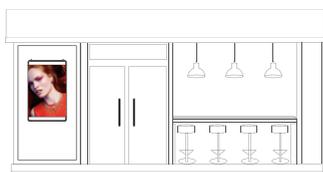

### Process design

Arc line and metal texture, bonding craft and design beauty.



# Post Screen Series

Create a more Valuable Urban Advertising Media



## Screen Size

700 × 1000

## Application Scenarios

Glass wall

## Post Screen Series

- Transparency: 85%
- Brightness : 5000cd/m<sup>2</sup>
- Depth: 37mm
- Viewing Angle: 160°



Super transparent



Smart



Simple




Energy saving

## Other Features

### Super(or ultra) transparent

More than 85% transparency, the highest transparency in led screen industry.



### High contrast ratio

High contrast ratio 1500:1, stunning color , dynamic image and eye-catching.




### Smart

Smart control by mobile APP , wireless data transmission , screen+data cloud+APP WIFI connection.




### Wider advertising Scope

160° viewing angle, eye-catching and wide scope.

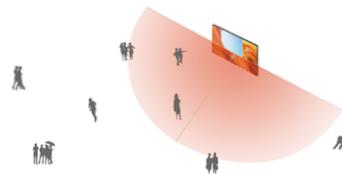

### Energy saving

240W power consumption per square meter.



### High refresh rate

High refresh rate: in the industry , the minimum pixel pitch ( able to mass production ) 3mm , 3840HZ refresh rate.


3840HZ



60HZ


## Dimensions (unit : mm)

730 X 1171 X 37 /  
25Kg/pc

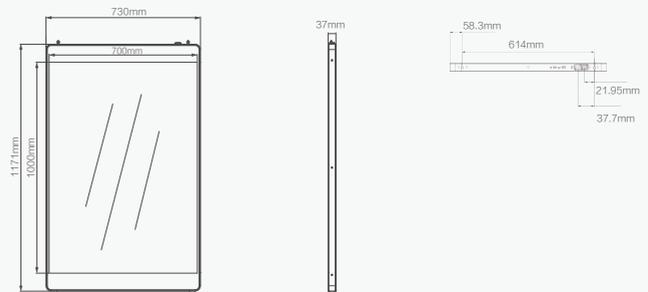

## Connectivity

- ① POWER
- ② LAN
- ③ WIFI
- ④ USB
- ⑤ CLOUDS
- ⑥ HEADSET
- ⑦ RESET
- ⑧ HDMI

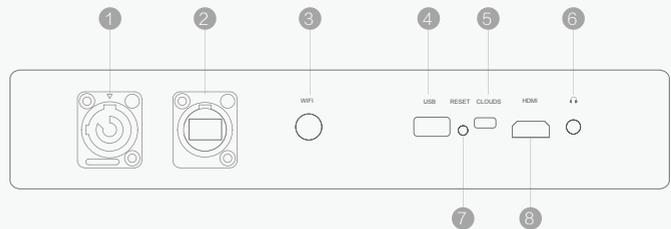

# Specifications

Size (mm) 700 X 1000

Model	P3
	-A
Pixel Pitch (mm)	3.9 x 7.8
Pixel Density (dot/ m <sup>2</sup> )	32768
The overall size(mm)	730 X 1171 X 37
Module Resolution (dot)	178 X 128
LED Type	SMD 3 in 1
Brightness (cd/ m <sup>2</sup> )	5000
Transparency	82%
Viewing Angle	160°
Gray Level	14bits
Scan Mode	1/6
Refresh Rate (Hz)	3840
Frame Frequency (Hz)	60
Avg.Power Consumption	240
Max.Power Consumption	800
Maintenance	Back
IP	IP42
Working Temp	-20~50°C
Weight (kg/ pc)	25

# System topology

